




1 square = 1"




Outer back slat

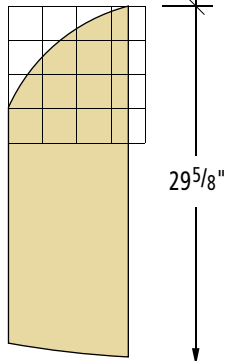


Intermediate back slat

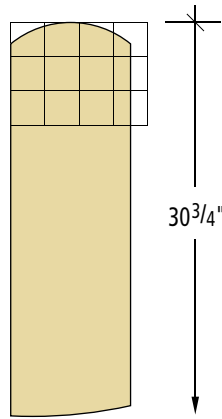


Center back slat




Arm bracket

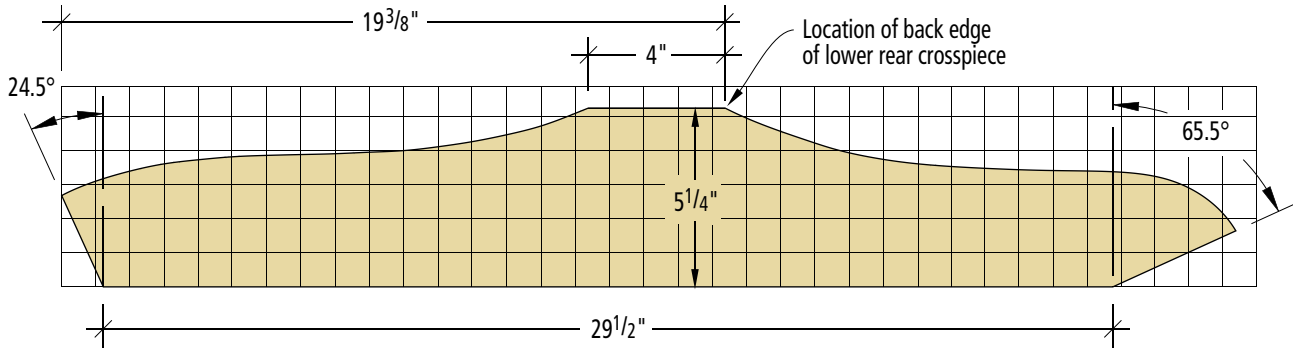


Side member

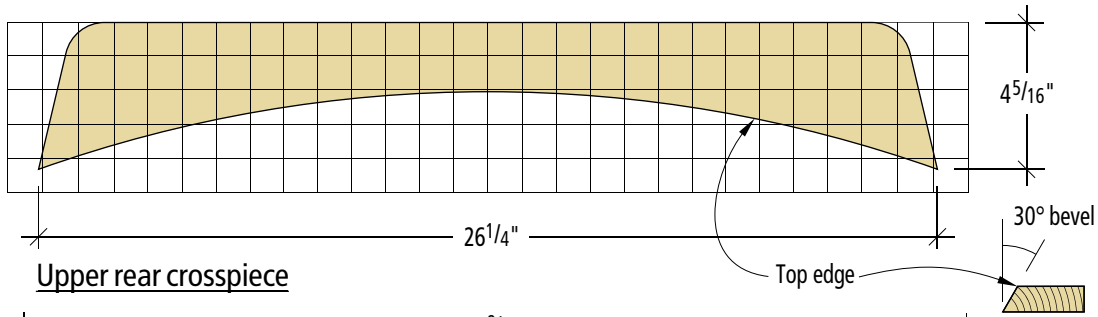


Upper rear crosspiece

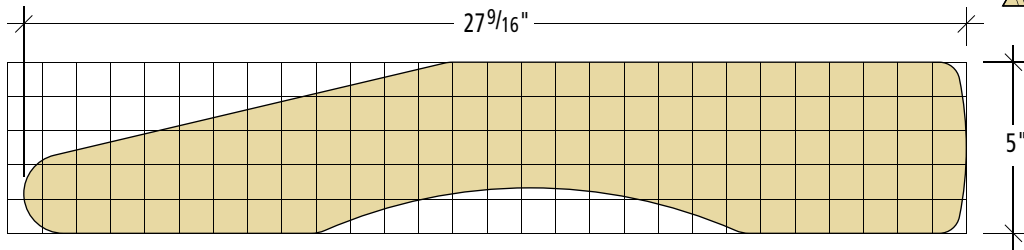



Arm


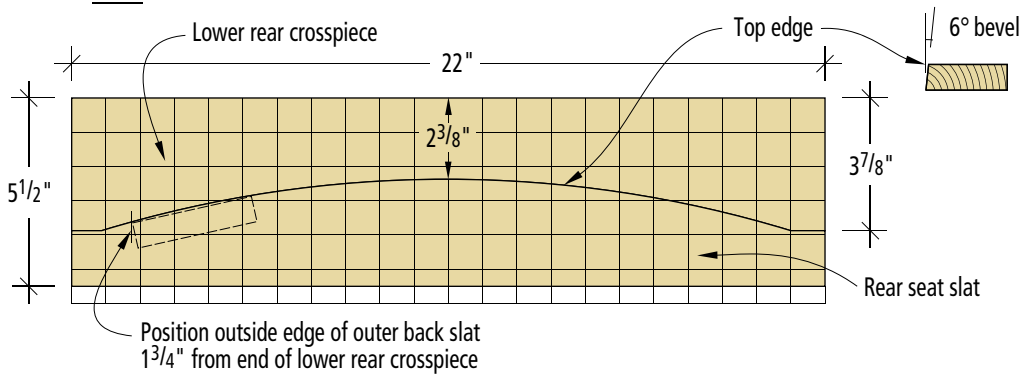


Lower rear crosspiece & rear seat slat

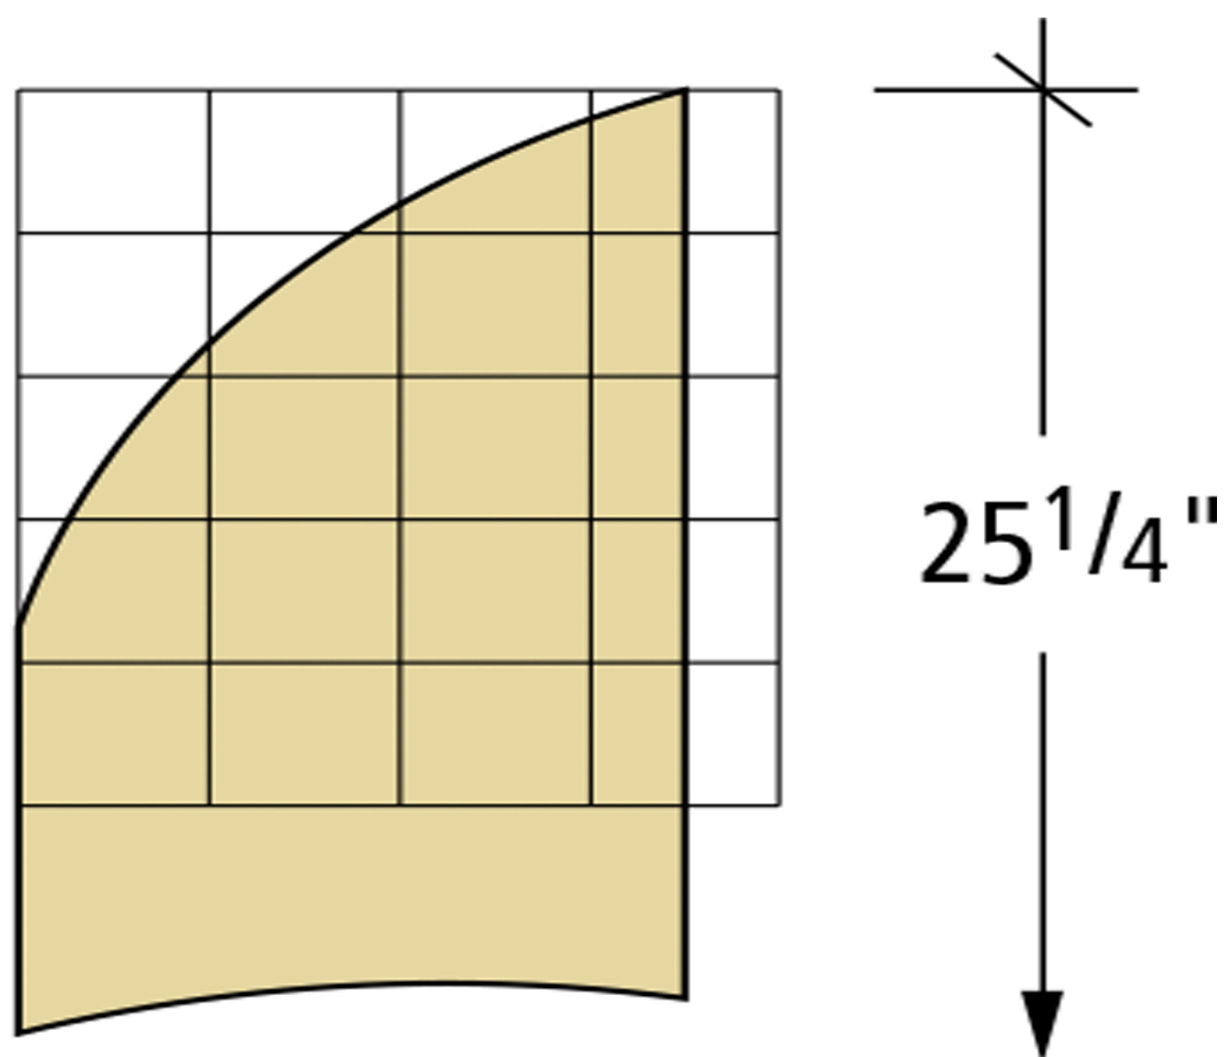

Outer back slat

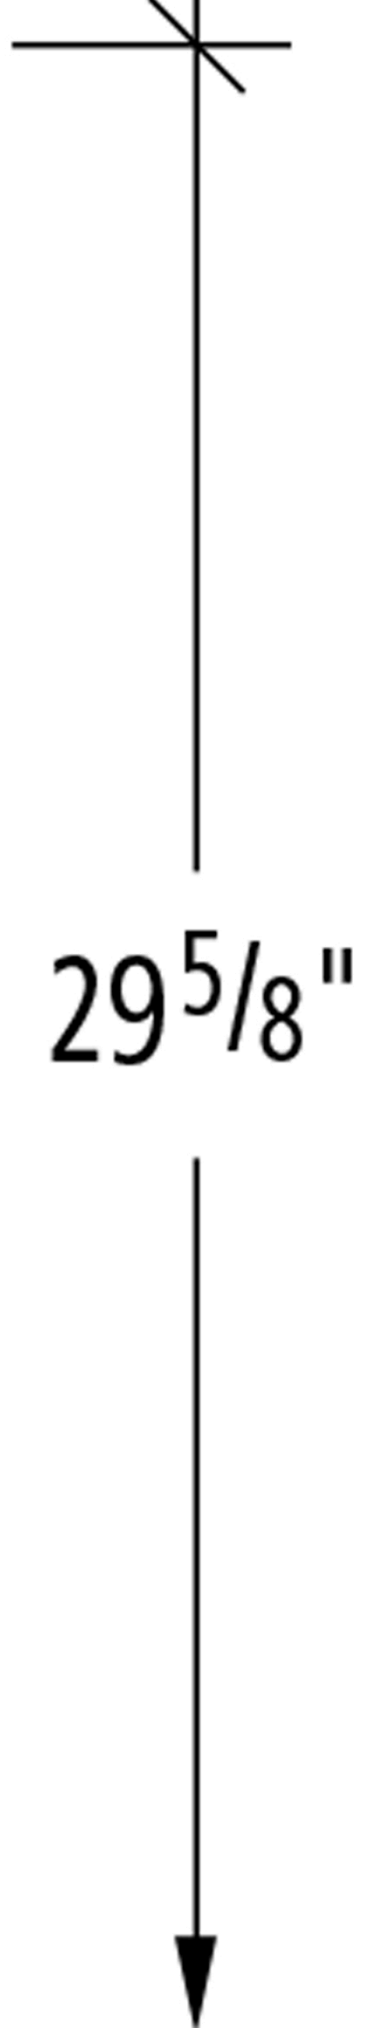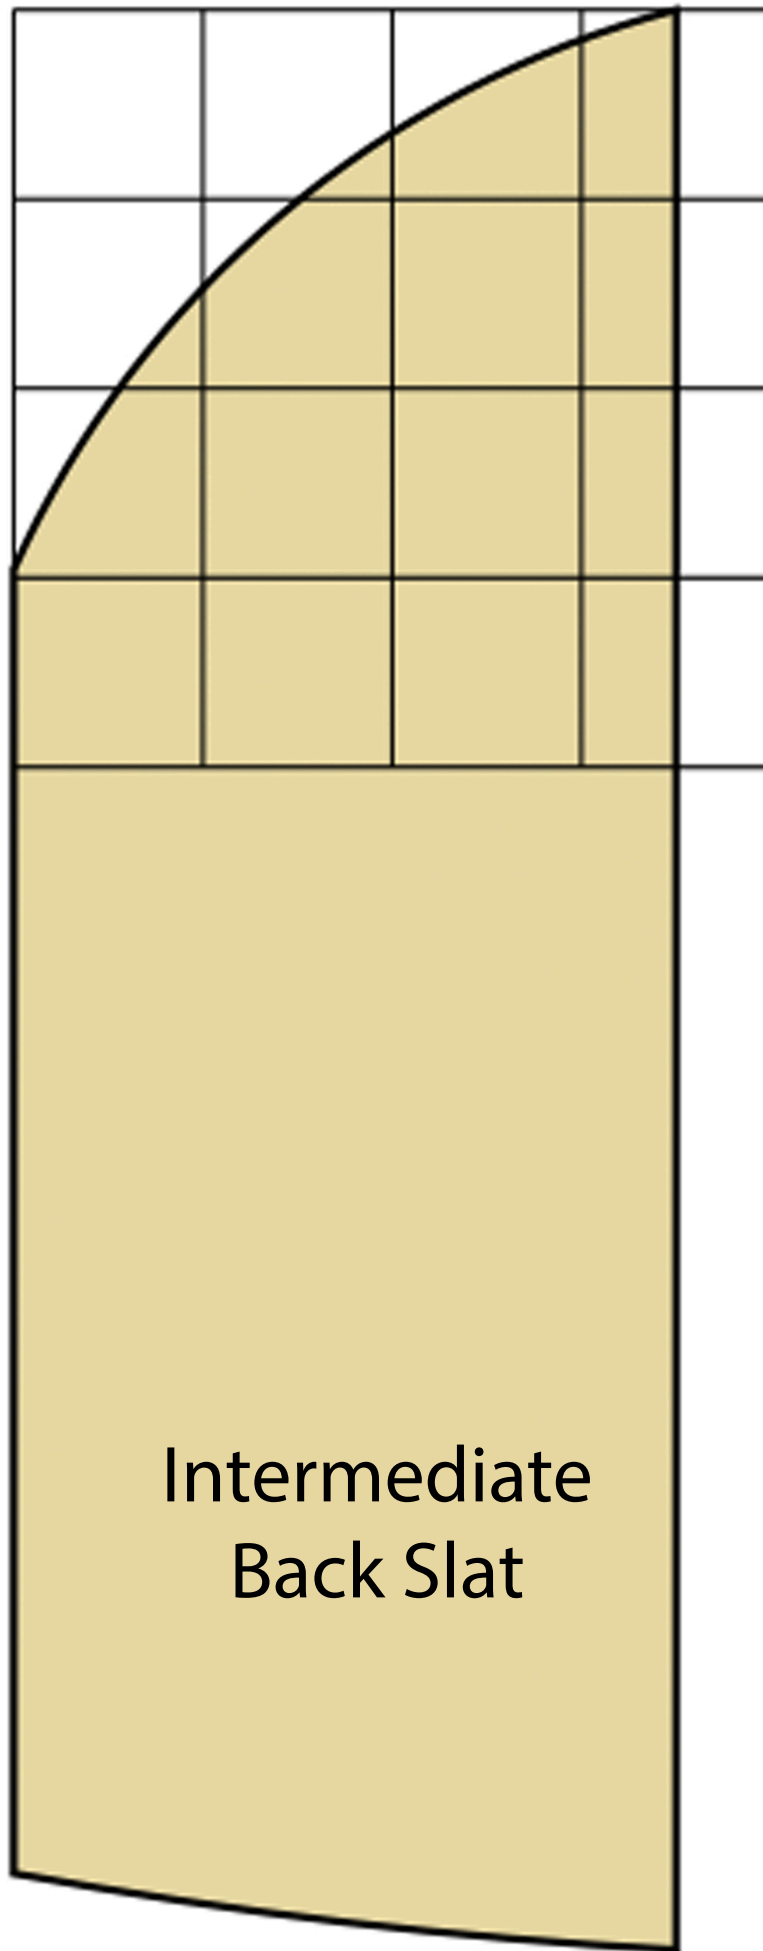


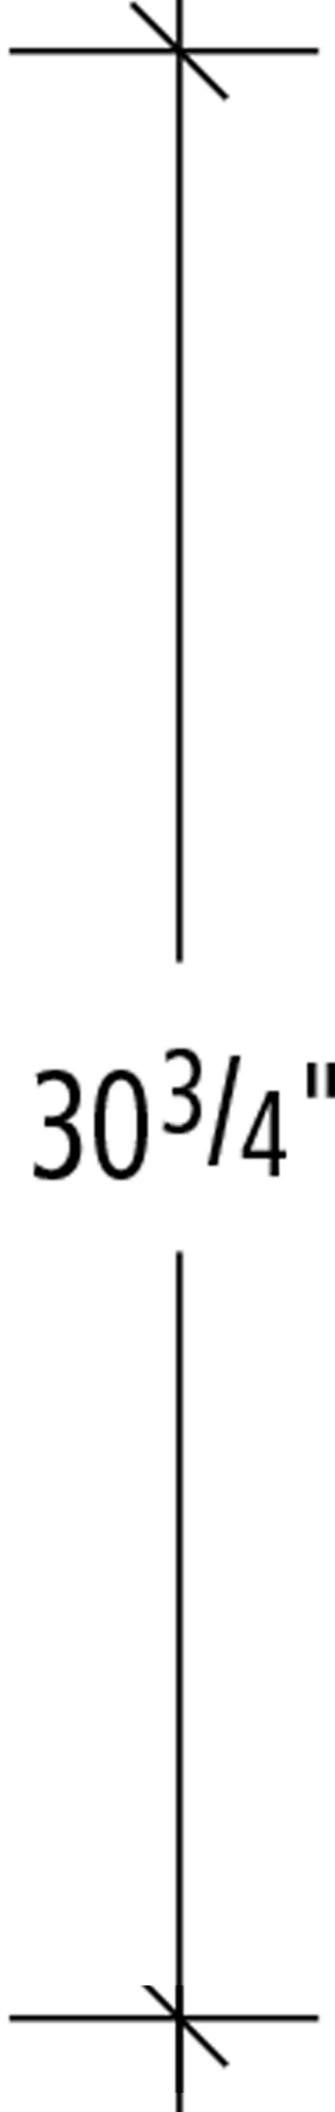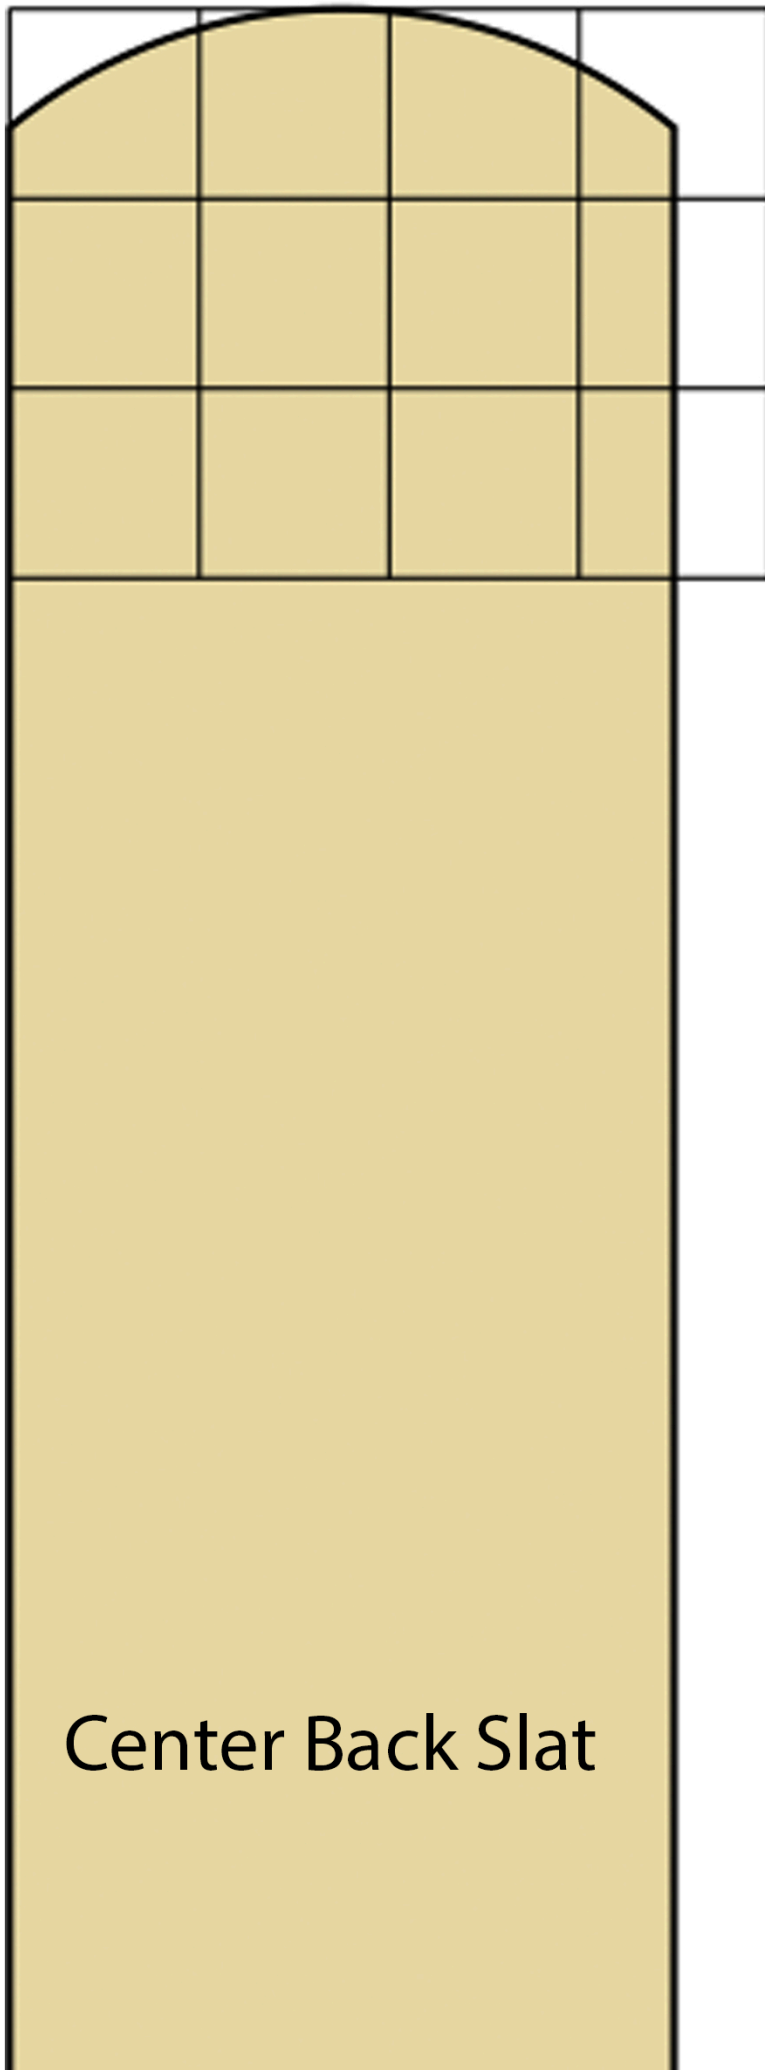

Center Back Slat

$30\frac{3}{4}''$

3"

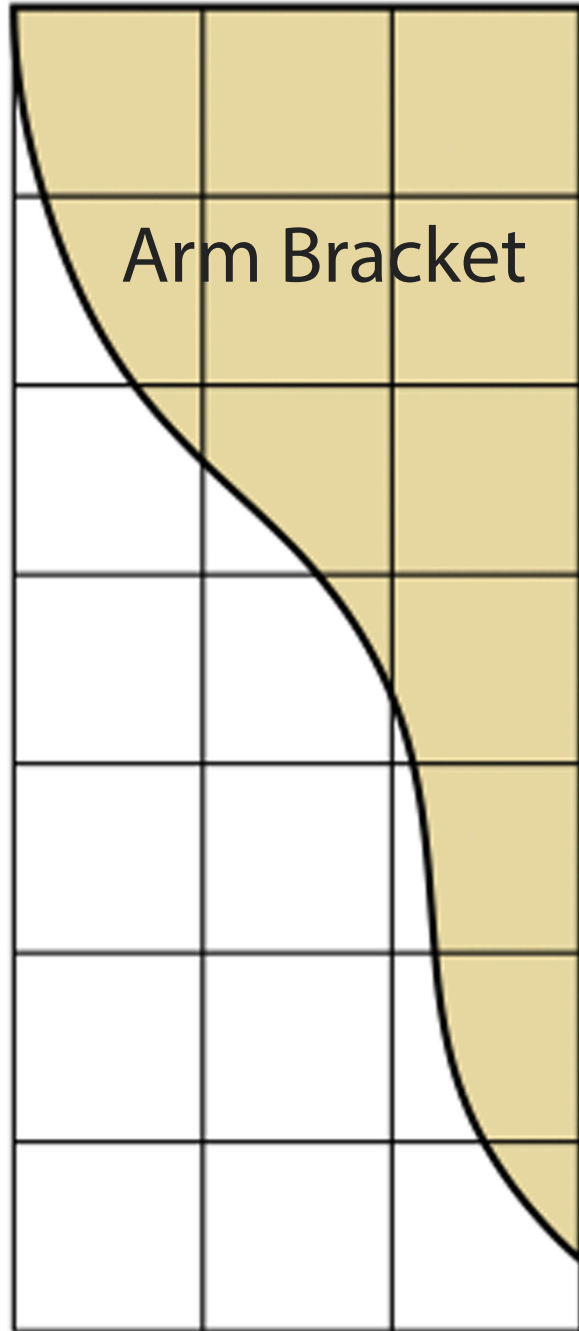

6⁵/₈"

19 3/8"

Location of back edge
of lower rear crosspiece


4"

5 1/4"


24.5°


65.5°

29 1/2"

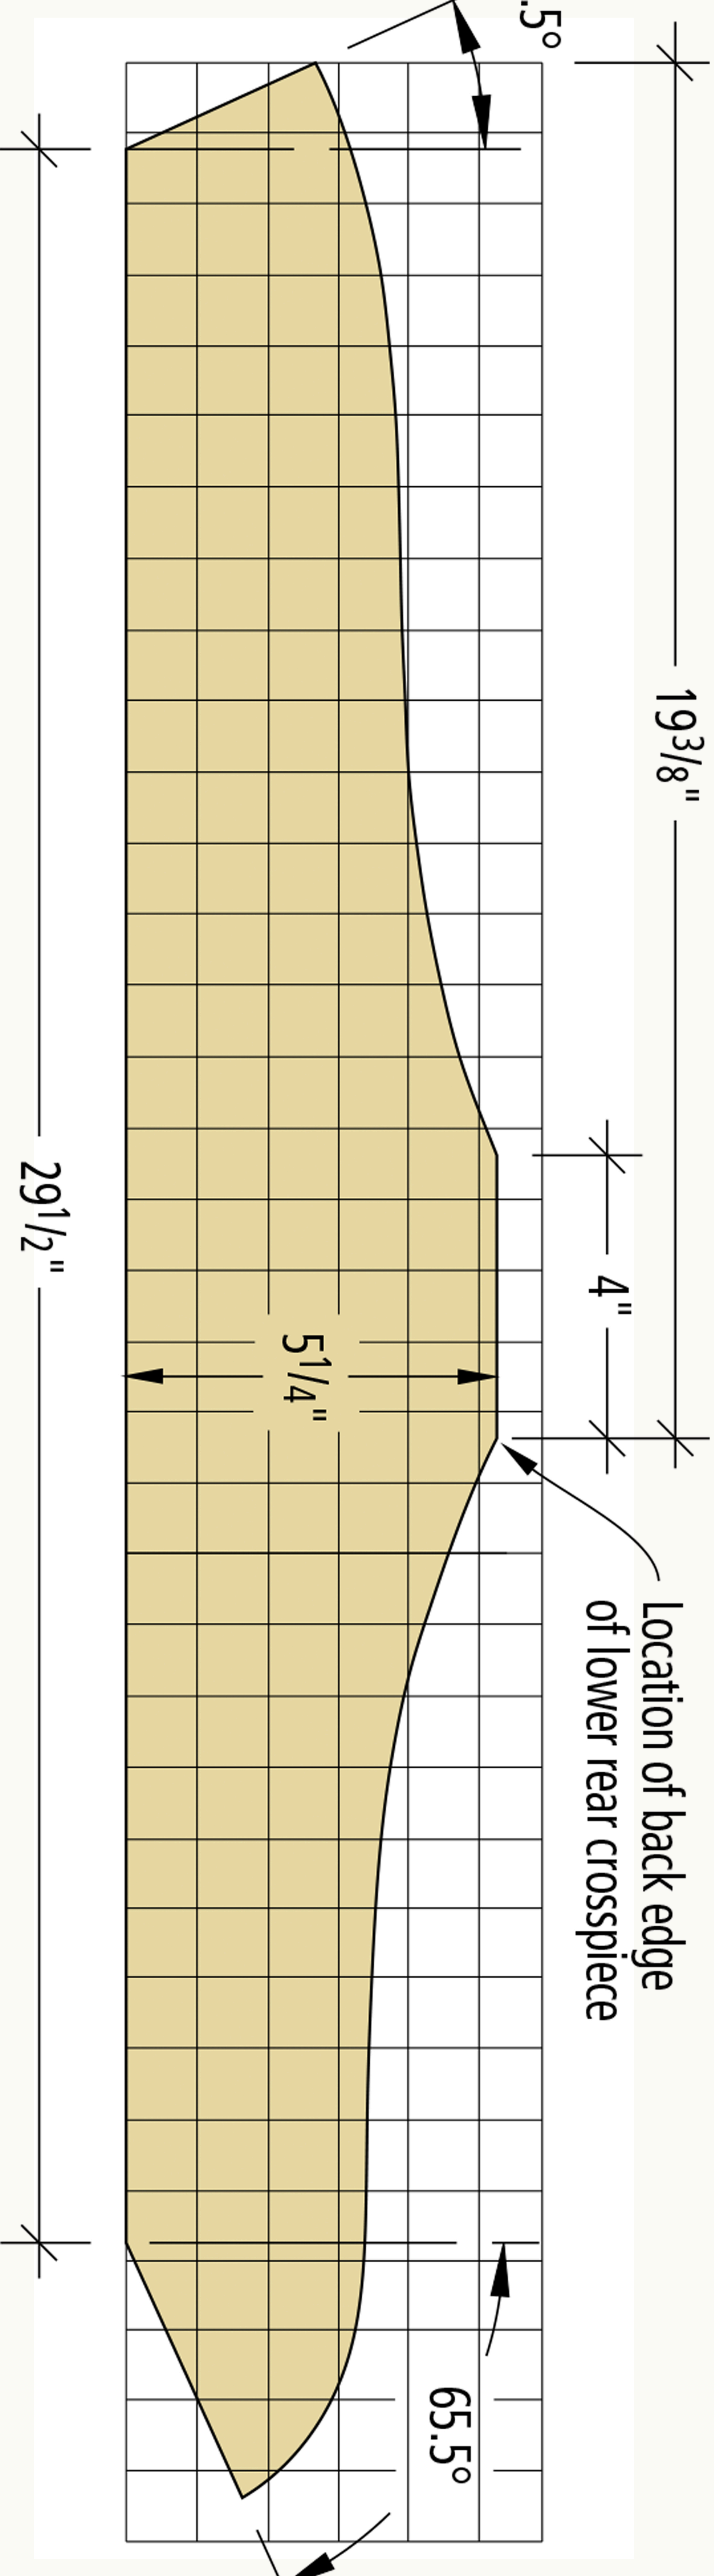


Side member

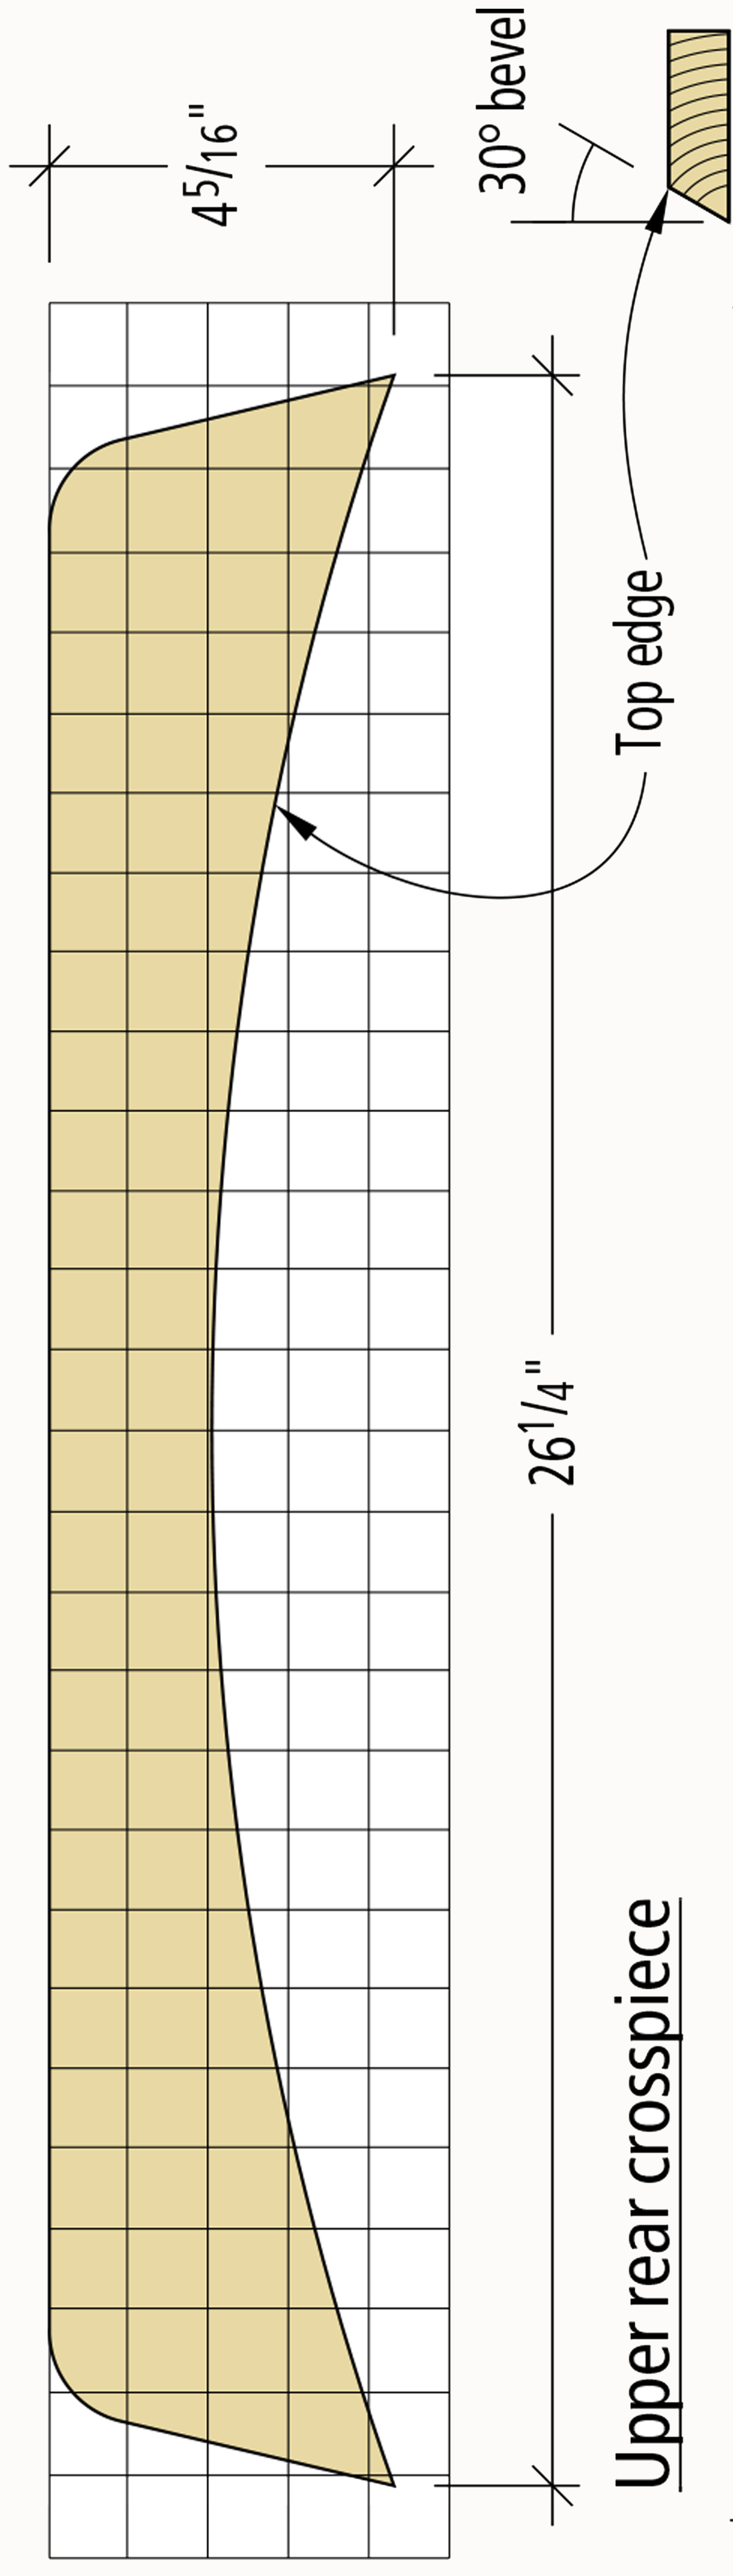

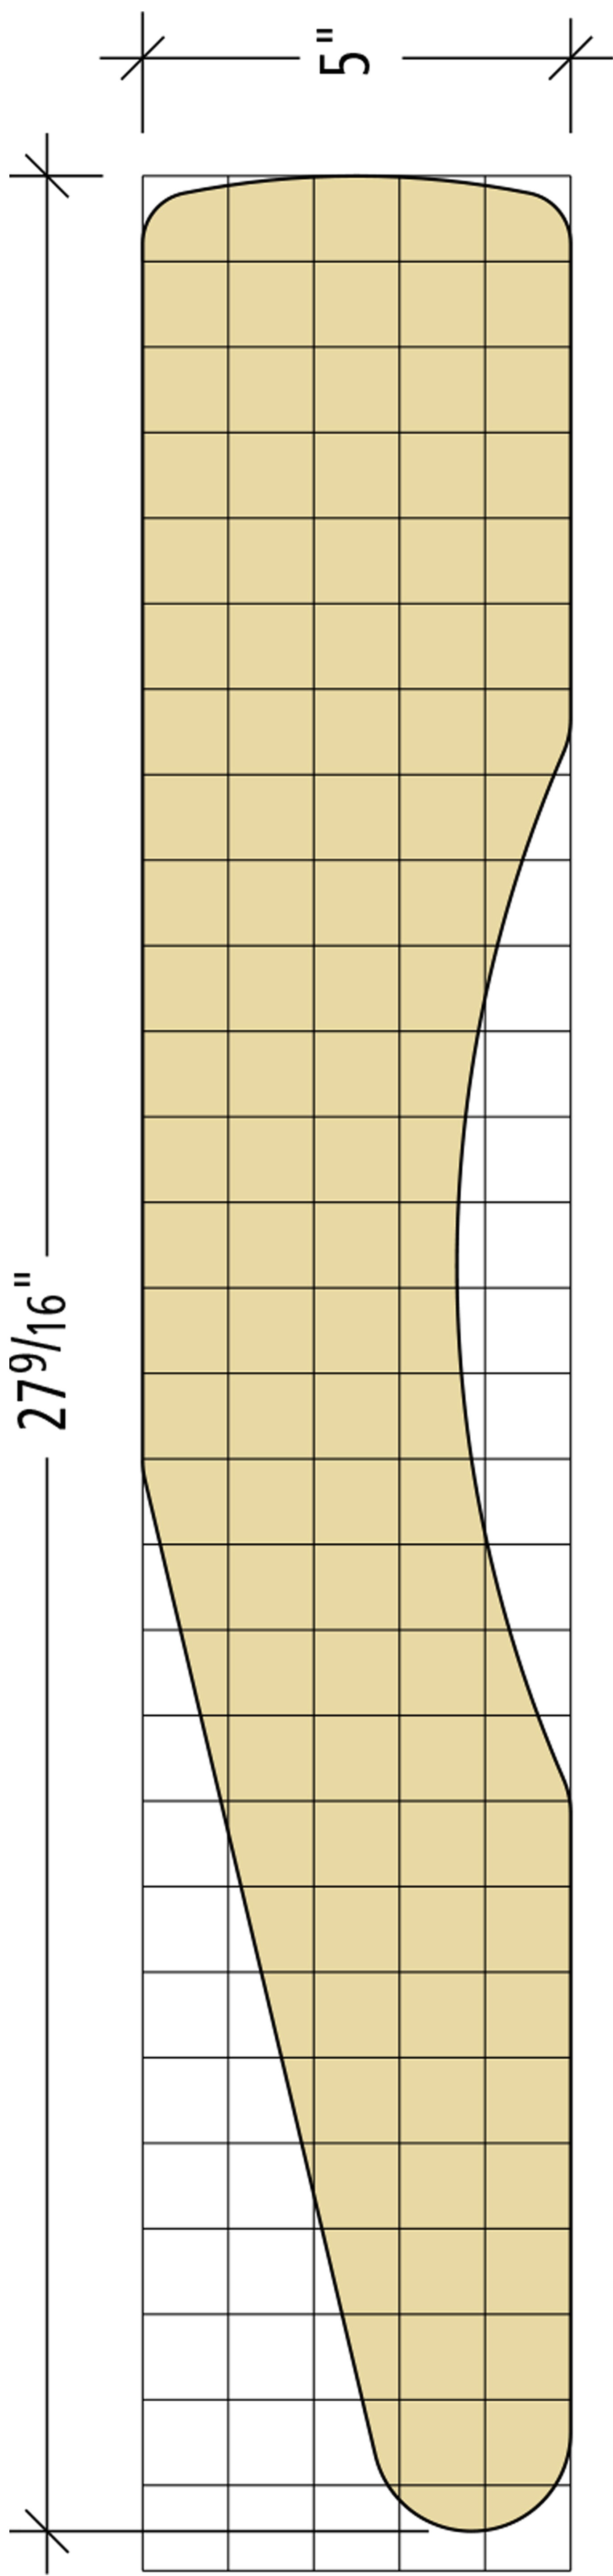

Arm

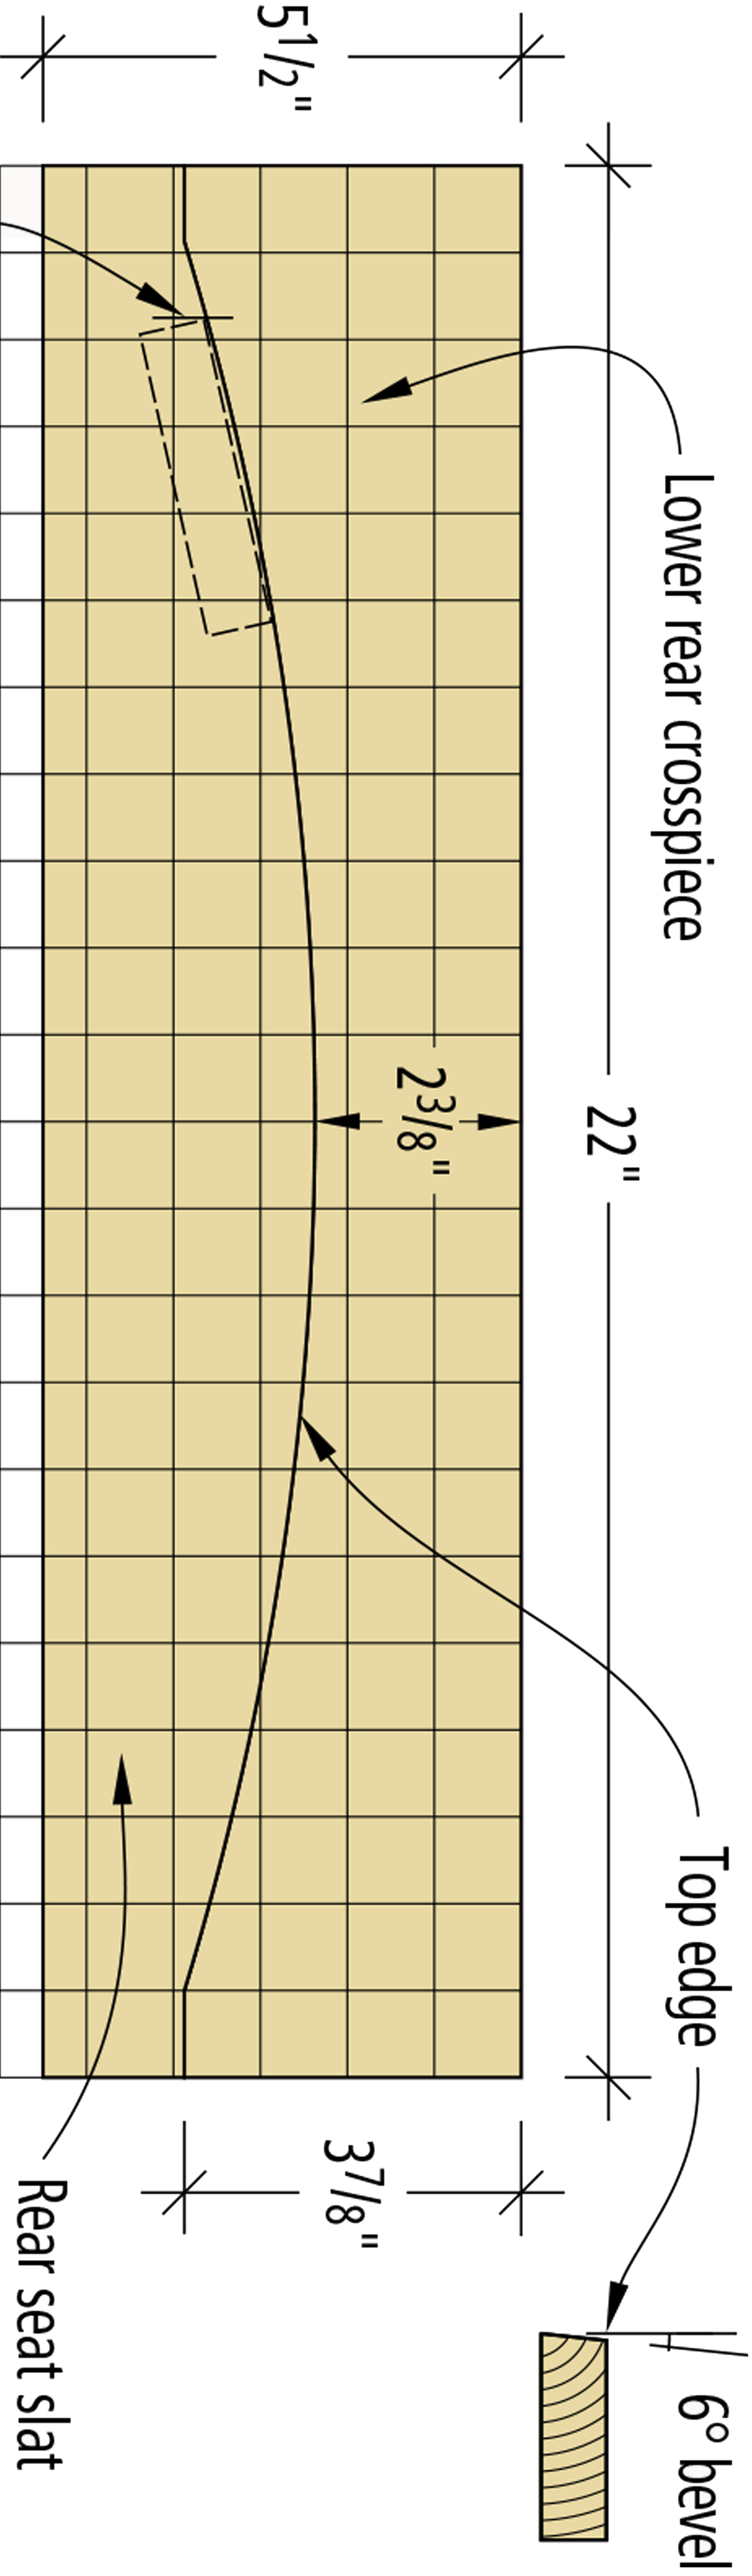

Lower rear crosspiece

22"

5 1/2"

2 3/8"

Top edge

6° bevel

3 7/8"

Rear seat slat

Position outside edge of outer back slat
1 3/4" from end of lower rear crosspiece